
#### PREDICTED ENERGY ASSESSMENT



Plot 161, 2 bed, K, WC, B Dwelling type: Date of assessment: Produced by: Total floor area: House, Semi-Detached 10/08/2021 Silvio Junges 74.38 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

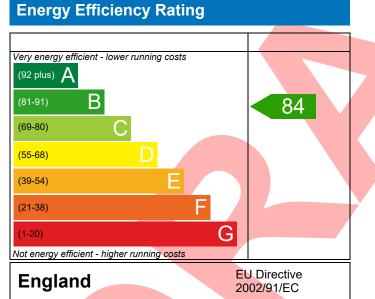

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

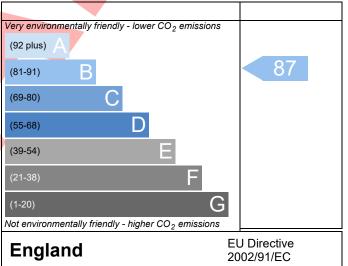

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Reference   Property   Property   SAP Rating   Environmental   CO2 Emissions (t/year)   General Requirements Co   Assessor Details   Mr. S   Silvio	61 lot 161, 2 bed, K, WC, B ompliance ilvio Junges, Silvio Junge	84 B 87 B 1.09 Pass	DER % DER <ter< th=""><th>17.69</th><th>AF2 MOB-SEMI-AS</th><th>19.15</th></ter<>	17.69	AF2 MOB-SEMI-AS	19.15	
GAP Rating Environmental CO <sub>2</sub> Emissions (t/year) General Requirements Co Assessor Details	ompliance	87 B 1.09	% DER <ter< th=""><th>17.69</th><th></th><th>19.15</th></ter<>	17.69		19.15	
Environmental CO <sub>2</sub> Emissions (t/year) General Requirements Co Assessor Details Silvio		87 B 1.09	% DER <ter< th=""><th>17.69</th><th></th><th>19.15</th></ter<>	17.69		19.15	
CO <sub>2</sub> Emissions (t/year) General Requirements Co Assessor Details Silvio		1.09	1				
General Requirements Co Assessor Details Mr. S silvio			DEEE		7.60		
Assessor Details Mr. S silvio		Pass	DFEE	45.98 TFEE		52.55	
silvio	ilvio Junges, Silvio Junge		Pass % DFEE <tfee 12.51<="" td=""><td></td></tfee>				
lient	.junges@aessouthern.co		242050,		Assessor ID	P637-0001	
	nern Home Counties, Bel	lway Homes					
UMARY FOR INPUT DATA	A FOR New Build (As Des	igned)					
riterion 1 – Achieving the	e TER and TFEE rate						
a TER and DER							
Fuel for main heating		Mains ga	as				
Fuel factor	1.00 (ma	1.00 (mains gas)					
Target Carbon Dioxide	19.15			kgCO <sub>2</sub> /m <sup>2</sup>			
Dwelling Carbon Dioxide Emission Rate (DER)		17.69			kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
		-1.46 (-7	.6%)		kgCO <sub>2</sub> /m <sup>2</sup>		
b TFEE and DFEE							
Target Fabric Energy Efficiency (TFEE)		52.55		kWh/m²/yr			
Dwelling Fabric Energy	Efficiency (DFEE)	45.98			kWh/m²/yr		
		-6.5 (-12	.4%)		kWh/m²/yr	Pass	
riterion 2 – Limits on des	ign flexibility		-				
Limiting Fabric Standa	rds						
2 Fabric U-values							
Element	Avera	age	H	lighest			
External wall	0.25	(max. 0.30)	(	).25 (max. 0.70	))	Pass	
Party wall	0.00	(max. 0.20)		-		Pass	
Floor	0.15	(max. 0.25)	x. 0.25) 0.15 (max. 0.70)			Pass	
Roof	0.11	(max. 0.20)	nax. 0.20) 0.11 (max. 0.35)			Pass	
Openings	1.38	8 (max. 2.00) 1.40 (max. 3.3)			))	Pass	
2a Thermal bridging							
Thermal bridging ca	Iculated from linear the	rmal transmitt	tances for each ju	inction			
<u>3 Air permeability</u>							
Air permeability at !	50 pascals	5.01 (de	sign value)		m³/(h.m²) @ 50 Pa		
Maximum					m³/(h.m²) @ 50 Pa Pass		
Limiting System Efficie	ncies						
4 Heating efficiency							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation	None	L		
Hot water storage	No cylinder			
-	No cymraet			
<u>6 Controls</u>		Pass		
Space heating controls	Time and temperature zone control			
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
<u>7 Low energy lights</u>				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
iterion 3 – Limiting the effects of heat gains in su	mmer			
Summertime temperature				
Overheating risk (Thames Valley)	Slight	Pass		
Overheating risk (Thames Valley)	Slight	Pass		
Overheating risk (Thames Valley)	Slight	Pass		
Overheating risk (Thames Valley) ased on:		Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang	Pass		
Overheating risk (Thames Valley) used on: Overshading Windows facing North Windows facing East Windows facing West	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate U-value			
Overheating risk (Thames Valley) sed on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate U-value			
Overheating risk (Thames Valley) used on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Average 0.72 m <sup>2</sup> , No overhang 4.83 m <sup>2</sup> , No overhang 2.81 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate U-value	Pass		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Average 0.72 m², No overhang 4.83 m², No overhang 2.81 m², No overhang 4.00 ach None DER and DFEE rate U-value 0.00 W/m²K	   Pass 0 Pa		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50	   Pass 0 Pa		
Overheating risk (Thames Valley) ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50	   Pass 0 Pa		
ased on: Overshading Windows facing North Windows facing East Windows facing West Air change rate Blinds/curtains Fiterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Average   0.72 m², No overhang   4.83 m², No overhang   2.81 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50   10.0 m³/(h.m²) @ 50	   Pass 0 Pa		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

### RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£345	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£372	A 96	A 99	
	, ,				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

