PREDICTED ENERGY ASSESSMENT




Plot 182, 2 bed, Dwelling type: House, Semi-Detached K. WC. B Date of assessment: 10/08/2021

Date of assessment: 10/08/2021 Produced by: Silvio Junges Total floor area: 74.38 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

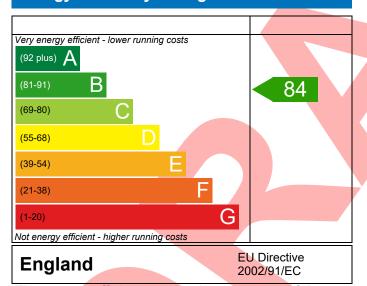

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

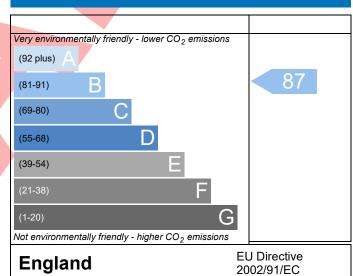

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference Assessment	e 4907-P637-5339-182		Pro	Issop Type Ref AF	sued on Date 2 MOB-SEMI-AS	10/08/2021		
Reference								
Property	Plot 182, 2 bed, K, W	С, В						
SAP Rating		84 B	DER	17.38	TER	19.00		
Environmental		87 B	% DER <ter< td=""><td></td><td>8.54</td><td></td></ter<>		8.54			
CO ₂ Emissions (t/y	ear)	1.07	DFEE	44.60	TFEE	51.83		
General Requirem	ents Compliance	Pass	% DFEE <tfee< td=""><td></td><td>13.96</td><td></td></tfee<>		13.96			
Assessor Details	Mr. Silvio Junges, Silvio J	unges, Tel: 01884	242050,		Assessor ID	P637-0001		
	silvio.junges@aessouthern.co.uk							
Client	Northern Home Counties, Bellway Homes							
SUMARY FOR INPU	T DATA FOR New Build (A	s Designed)						
Criterion 1 – Achiev	ving the TER and TFEE rate							
1a TER and DER								
Fuel for main he	eating	Mains ga	Mains gas					
Fuel factor		1.00 (ma	1.00 (mains gas)					
Target Carbon D	oioxide Emission Rate (TER)	19.00	19.00 kgCO ₂ /m ²					
Dwelling Carbor	n Dioxide Emission Rate (DI	ER) 17.38	17.38 kgCO ₂ /m²					
-1.62 (-8.5%) kgCO ₂ /m ²								
1b TFEE and DFEE								
_	ergy Efficiency (TFEE)	51.83	51.83 kWh/m²/yr					
Dwelling Fabric	Energy Efficiency (DFEE)	44.60						
		-7.2 (-13	.9%)		kWh/m²/yr	Pass		
	on design flexibility							
Limiting Fabric S	Standards							
2 Fabric U-value	<u>es</u>							
Element		Average	Hi	ighest				
External		0.25 (max. 0.30)	0.	25 (max. 0.70)		Pass		
Party wa		0.00 (max. 0.20)	-			Pass		
Floor		0.12 (max. 0.25)				Pass		
Roof		0.11 (max. 0.20)				Pass Pass		
Openings		1.38 (max. 2.00)	(max. 2.00) 1.40 (max. 3.30)					
2a Thermal brid			_					
	lging calculated from linear	r thermal transmit	tances for each jur	nction				
3 Air permeabil		-						
Air permeab		5.01 (design value) m ³ /(h.m ²)						
						Pass		
Limiting System	Efficiencies							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 30	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	F 833
	·	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sun	nmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing East	2.81 m², No overhang	
Windows facing South	0.72 m ² , No overhang	
Windows facing West	4.83 m², No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with I	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	ì
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Floor U-value	0.12 W/m²K	
Thermal bridging y-value	0.034 W/m²K	
merinar bridging y value	VV/III K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£345	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£372	A 96	A 99	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

