PREDICTED ENERGY ASSESSMENT



Plot 173, 2 bed, K. WC. B

Dwelling type: House, Semi-Detached Date of assessment:


10/08/2021

Produced by: Silvio Junges Total floor area: 74.38 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

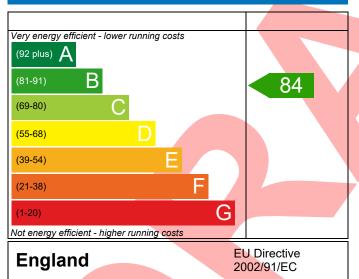

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

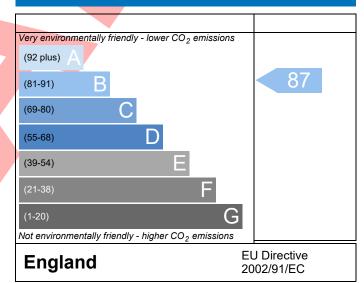

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Referenc	e 4907-P637-533	9-173				Issued on Date	10/08/202	
Assessment	Prop Type Re			AF2 MOB-SEMI-OPP				
Reference								
Property	Plot 173, 2 bed	K, WC, B						
SAP Rating			84 B	DER	17.52	TER	19.15	
Environmental			87 B	% DER <ter< td=""><td></td><td>8.49</td><td></td></ter<>		8.49		
CO₂ Emissions (t/year)			1.08	DFEE	45.19	TFEE	52.55	
General Requirem	ents Compliance		Pass	% DFEE <tfee< td=""><td></td><td>14.01</td><td></td></tfee<>		14.01		
Assessor Details	Mr. Silvio Junges, S	ilvio Junges,	Tel: 01884 2	242050,		Assessor ID	P637-0001	
silvio.junges@aessouthern.co.uk								
Client	Northern Home Co	unties, Bellw	ay Homes					
UMARY FOR INPU	T DATA FOR New Bu	ild (As Desig	ned)					
riterion 1 – Achiev	ving the TER and TFEI	rate						
a TER and DER								
Fuel for main he	eating		Mains ga	S				
Fuel factor			1.00 (ma	ins gas)				
Target Carbon Dioxide Emission Rate (TER)			19.15 kgCC					
Dwelling Carbon Dioxide Emission Rate (DER)			17.52 kgCO ₂ /m ²					
			-1.63 (-8	5%)		kgCO ₂ /m ²		
b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE) Dwelling Fabric Energy Efficiency (DFEE)			52.55			kWh/m²/yr		
			45.19			kWh/m²/yr		
			-7.3 (-13	9%)		kWh/m²/yr	Pass	
riterion 2 – Limits	on design flexibility			,				
Limiting Fabric	Standards							
2 Fabric U-value	<u>es</u>							
Element		Average	e		Highest			
External	wall	0.25 (m	ax. 0.30)		0.25 (max. 0.7	0)	Pass	
Party wa		0.00 (m	ax. 0.20)		-	Pass		
Floor		0.12 (m	ax. 0.25)		0.12 (max. 0.7	Pass		
Roof			ax. 0.20)		0.11 (max. 0.3	Pass		
Opening		1.38 (m	8 (max. 2.00) 1.40 (max. 3.30)				Pass	
2a Thermal brid	lging							
Thermal brid	lging calculated from	linear therm	al transmitt	ances for each	junction			
3 Air permeabil	ity							
Air permeability at 50 pascals			5.01 (design value)			m³/(h.m²) @ 50 Pa		
All perfileab								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 30	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	1 433
Boiler interlock	Yes	
	res	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	0.72 m², No overhang	
Windows facing Bast	2.81 m ² , No overhang 4.83 m ² , No overhang	
Windows facing West		
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	1
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Floor U-value	0.12 W/m²K	
Thermal bridging y-value	0.034 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£345	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£372	A 96	A 99	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

