

# PREDICTED ENERGY ASSESSMENT




Plot 54, Millfield Nurseries, Spalding Common, Dwelling type: House, Semi-Detached  
 Spalding, Date of assessment: 19/05/2022  
 Lincs, Produced by: Jake Eaton  
 PE11 3AU Total floor area: 87.08 m<sup>2</sup>

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.


## Energy Efficiency Rating

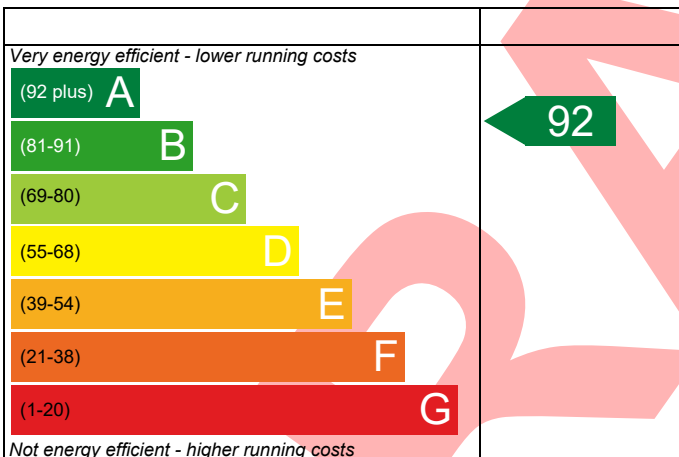

**England** EU Directive 2002/91/EC

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

## Environmental Impact (CO<sub>2</sub>) Rating

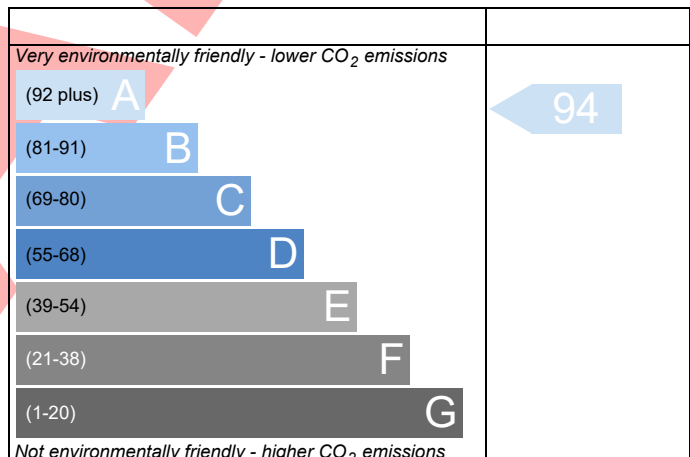

**England** EU Directive 2002/91/EC

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

# BUILDING REGULATION COMPLIANCE

## Calculation Type: New Build (As Designed)



Property Reference	PE11 3AU Plot 54	Issued on Date	19/05/2022
Assessment Reference	001	Prop Type Ref	Type G Semi
Property	Plot 54, Millfield Nurseries, Spalding Common, Spalding, Lincs, PE11 3AU		
SAP Rating	92 A	DER	7.84
Environmental	94 A	TER	17.11
CO <sub>2</sub> Emissions (t/year)	0.46	% DER<TER	54.17
General Requirements Compliance	Pass	DFEE	40.69
		TREE	47.84
		% DFEE<TFEE	14.95
Assessor Details	Mr. Jake Eaton, Jake Eaton, Tel: 01400283471, jake@aeratech.co.uk	Assessor ID	P711-0001
Client			

### SUMMARY FOR INPUT DATA FOR New Build (As Designed)

#### Criterion 1 – Achieving the TER and TFE rate

##### 1a TER and DER

Fuel for main heating	Mains gas		
Fuel factor	1.00 (mains gas)		
Target Carbon Dioxide Emission Rate (TER)	17.11	kgCO <sub>2</sub> /m <sup>2</sup>	
Dwelling Carbon Dioxide Emission Rate (DER)	7.84	kgCO <sub>2</sub> /m <sup>2</sup>	Pass
	-9.27 (-54.2%)	kgCO <sub>2</sub> /m <sup>2</sup>	

##### 1b TFE and DFEE

Target Fabric Energy Efficiency (TFEE)	47.84	kWh/m <sup>2</sup> /yr	
Dwelling Fabric Energy Efficiency (DFEE)	40.69	kWh/m <sup>2</sup> /yr	
	-7.1 (-14.9%)	kWh/m <sup>2</sup> /yr	Pass

#### Criterion 2 – Limits on design flexibility

##### Limiting Fabric Standards

##### 2 Fabric U-values

Element	Average	Highest	
External wall	0.23 (max. 0.30)	0.23 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Floor	0.12 (max. 0.25)	0.12 (max. 0.70)	Pass
Roof	0.13 (max. 0.20)	0.13 (max. 0.35)	Pass
Openings	1.38 (max. 2.00)	1.40 (max. 3.30)	Pass

##### 2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

##### 3 Air permeability

Air permeability at 50 pascals	5.01 (design value)	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass

##### Limiting System Efficiencies

##### 4 Heating efficiency

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

# BUILDING REGULATION COMPLIANCE

## Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 24 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
<b>5 Cylinder insulation</b>		
Hot water storage	No cylinder	
<b>6 Controls</b>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
<b>7 Low energy lights</b>		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
<b>8 Mechanical ventilation</b>		
Continuous extract system (decentralised)		
Specific fan power	0.1100 0.1400	
Maximum	0.7	Pass

### Criterion 3 – Limiting the effects of heat gains in summer

#### 9 Summertime temperature

Overheating risk (East Pennines)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North	4.19 m <sup>2</sup> , No overhang	
Windows facing East	1.20 m <sup>2</sup> , No overhang	
Windows facing South	11.11 m <sup>2</sup> , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight hours	

### Criterion 4 – Building performance consistent with DER and DFEE rate

#### Party Walls

Type	U-value		
Filled Cavity with Edge Sealing	0.00	W/m <sup>2</sup> K	Pass

#### Air permeability and pressure testing

##### 3 Air permeability

Air permeability at 50 pascals	5.01 (design value)	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

# BUILDING REGULATION COMPLIANCE

## Calculation Type: New Build (As Designed)



### 10 Key features

Party wall U-value	0.00	W/m <sup>2</sup> K
Floor U-value	0.12	W/m <sup>2</sup> K
Photovoltaic array	1.50	kW

DRAFT

*This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.*